

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
18 November 2004 (18.11.2004)

PCT

(10) International Publication Number
WO 2004/100074 A1

(51) International Patent Classification⁷: **G07B 15/00,**
G08B 25/10, H04Q 7/36

(21) International Application Number:
PCT/SE2004/000688

(22) International Filing Date: 7 May 2004 (07.05.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0301324-0 7 May 2003 (07.05.2003) SE

(71) Applicant (for all designated States except US): EPP
ELECTRONIC PAYMENT PATENT AB [SE/SE]; P.O.
Box 1227, S-181 31 Stockholm (SE).

(72) Inventor; and

(75) Inventor/Applicant (for US only): DE BONNENFANT,
Björn [SE/SE]; Själagårdsgatan 8A, S-111 31 Stockholm
(SE).

(74) Agent: EHRNER & DELMAR PATENTBYRÅ AB;
P.O. Box 10316, S-100 55 Stockholm (SE).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.


(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,
SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: A METHOD FOR PROVIDING A SYSTEM WITH POSITION INFORMATION FROM A MOBILE UNIT

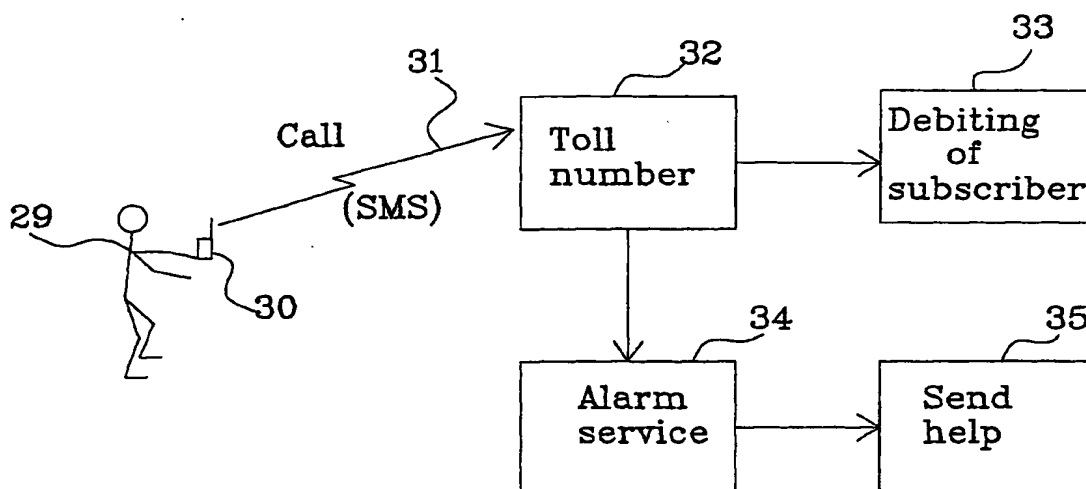

(57) Abstract: The present invention relates to a method for providing a system that is operated by a first party, with position information from a mobile unit 16 provided with a unique identity that belongs to a second party. The first party provides a service that is dependent of the position of the mobile unit 16, and the second party activates the use of the service. The method comprises the steps to send a signal from the mobile unit 16 via a communication network, when the second party activates the use of the service, to a toll number associated with a certain charge, the signal comprises information regarding the identity of the mobile unit 16 and position indication provided by the communication network, and to debit said charge from an account connected to the mobile unit 16 and said second party. The invention also relates to a mobile unit and a system.

WO 2004/100074 A1

2/pets
JC20 Rec'd PCT/PTO 07 NOV 2009**A METHOD FOR PROVIDING A SYSTEM WITH POSITION INFORMATION FROM
A MOBILE UNIT****Technical field**

5 The present invention relates to a technical field according to the method as defined in the preamble of claim 1. The invention also relates to a mobile unit as defined in the preamble of claim 16 and a system as defined in the preamble of claim 21.

Background to the invention

10 In present systems for managing road tolls, there is a large initial cost regarding the building of infra structure, e.g. roads, toll stations, charging systems, and costs for operating the system with employed personnel. These costs must thereafter be paid by those who will use the area within the
15 toll station for driving, and thus an increase in investment and maintenance costs. An example of a method for managing debiting in such a toll system is described in the published international patent application WO 99/31629.

20 In the alarm and protective transport systems that are currently used today, there is in most cases a dependency of positioning via GPS, which in it self is a very accurate technique, but unfortunately has some built-in weaknesses such as that at least three GPS satellites must be visible from the mobile unit for it to be able to calculate its position. A
25 mobile unit is normally kept in a pocket, within a container, on a covered van, etc. and there is then impossible for the unit to update its position.

The telephone network may be used to find the position of a mobile telephone within a certain geographical region. Such a

method is described in the published international patent application WO 00/59254, where mobile base stations are used to calculate the position of possible mobile telephones in an avalanche area. By weighting the received signals, using their
5 different signal strength, between the base stations it is possible to determine the position of the mobile telephone, and thereby the person that may be buried in the avalanche.

Summary of the invention

The object if the present invention is to provide a method and
10 a mobile unit to supply a system with positioning information from the mobile unit to use this information to locate the mobile unit without the disadvantages mentioned above.

This object is achieved by the method as defined in the characterizing part of claim 1, and the mobile unit as defined
15 in the characterizing part of claim 16, which is based on using an already built telephone network that in turn is based on a division of a geographic location, e.g. a city, into a plurality of cells, where the poisoning information from the mobile unit may be determined from the cells that receive
20 signals from the mobile unit.

It is also an object to provide a system for tracking a mobile unit without the disadvantages mentioned above.

This object is achieved by the system as defined in the characterizing part of claim 21.

25 An advantage with the present invention is that it is simple to build up a toll system without heavy infrastructural costs.

Another advantage is that the present invention is simple to use compared to prior art techniques, for instance it is

possible to follow transports of goods since the mobile unit regularly sends out its positioning information to a receiver.

A further advantage is that it is possible to connect sensors, and even alarm buttons, to the mobile unit to thereby be able
5 to use the unit as a personal alarm, be able to detect unwanted movement of a car, boat, marine engine, etc.

A further advantage with the invention is that a reliable system is obtained, where included parts are not expensive to manufacture.

10 Further advantages and objects with the present invention will be apparent for skilled person in the arts from the following detailed description.

Brief description of the drawings

The different embodiments shown in the appended drawings are
15 schematic and should only be seen as illustrations to clarify the invention, and should not be interpreted as limitations of the invention.

Fig. 1 shows a system for managing debiting of toll charges according to the invention.

20 Fig. 2 shows an overview of a toll area with adherent cells.

Fig. 3 shows a personal alarm system according to the invention.

Fig. 4 shows an anti-theft system according to the invention.

Detailed description of preferred embodiments

25 Figure 1 shows a schematic view of a toll system 10, where a vehicle 11 is shown in a position A, denoted 11_A, outside a

border 12 for the area that demand payment of a toll charge to be allowed to enter. The same vehicle 11 is also depicted in a position B within the toll zone 13, where the vehicle is shown with dashed lines and denoted 11_B.

5 Two base station antennas for a mobile telephone network, e.g. GSM 900, GSM 1800, PCS 1900, etc. are also shown in figure 1, where a first base station antenna that defines a first cell 14 is placed outside the toll zone 13, and a second base station antenna that defines a second cell 15 is placed inside
10 the toll zone 13. A mobile unit 16, denoted 16_A and 16_B, is mounted in the vehicle 11.

The mobile unit may in its simplest embodiment consist of a mobile telephone, where a SIM card is mounted connected to a telephone subscription that belong to the person that should
15 pay the toll charge, which in most cases is the owner to the vehicle. The mobile unit 16 is furthermore fixed mounted to the vehicle to make it simpler to use to register the number of occasions the vehicle passes into a toll zone 13, and how the vehicle 11_B moves within the toll zone.

20 In a more advances embodiment of the mobile unit 16, the keypad and the display has been removed. Furthermore, energy saving algorithms has been implemented to increase the operational time for the internally arranged battery, such, algorithms makes the unit decrease to a very low power
25 consumption level for periods of time and regularly return back to normal function to check which cell in the mobile network the unit has contact with. In the application for tolls, the unit is always connected to a supply voltage, since the unit always should be used together with the vehicle. If
30 the supply voltage is disconnected by any reason from the unit 16, its internal battery may continue to work up to several

months. The processor and memory capacity on the SIM card, which preferably is mounted in the unit 16, are also used to manage the simple steps that are required to register toll charges according to the present invention.

5 To further clarify how the cells in a mobile network are used to build up a toll zone, a such zone 13 is shown in figure 2 comprising three cells 14, 20 and 21. The dashed line 12 constitutes the boundary for the zone 13 and follows the contour of the lobes of the base stations. The mobile unit
10 should regularly be updated by a list of which cells that together constitutes the toll zone. This update may easily be performed by sending a SMS message to all mobile units 16 with a current list. The SMS message is thereafter unpacked automatically and installed in a suitable memory space
15 (internally on the SIM card or in a separate memory in the unit 16). The formulation of the SMS message that is sent is easiest performed on an ordinary personal computer.

When a vehicle 11_A is situated outside the toll zone 13, the mobile unit 16_A has contact with the base station antenna 14' in the cell 14 and when the boundary 12 is passed by the
20 vehicle 11_B, the base station antenna 15' in cell 15 has also contact with the unit 16_B, which initiates a call to a toll number that debits the holder of the mobile subscription a predetermined amount, e.g. 20 Swedish kronor, since the cell
25 15 is on the list that defines the toll zone 13.

Other types of call may naturally be considered, e.g. SMS, MMS, etc. to register a debit entry of the toll charge.

This is the classical type of toll charge, but there are a number of variants that easily may be implemented with the
30 help of the present invention.

Time based debiting: this debit entry depends on the time that the vehicle is present within a toll zone, where the toll zone even could be divided into zones where each has a predetermined time cost. For example, a scenario that is plausible is where it is a desired to reduce and divert traffic away from a certain area, e.g. old town in Stockholm. Therefore, the time based cost for the zone "Old town" is set to an amount that is twice the amount of neighboring zones "södermalm", "city", "östermalm". This time based debiting is implemented by the mobile unit regularly calls a toll number that corresponds to the cost that is appropriate for the zone that the vehicle presently is in.

In this way it is easy to charge those that only drive within a toll zone 13 and then usually would not pass a boundary 12 and therefore should avoid debiting for entering a toll zone 13 as described above.

If a vehicle passes through a toll zone 13 on a through route 22, the charge that is debited when entering of the toll zone 23 may be compensated by fully or partially credit the holder of the mobile telephone subscription when leaving 24 the zone 13. A condition for such a crediting may be that the transport on the through route is performed within a certain time. In the usual case, the through routes are surrounded by its own cells, since many users of mobile telephones daily use these through routes, and this problem does not occur at all as these cells naturally is not part of the list of cells that belong to the toll zone.

If there is a problem with defining cells that only are used for through routes, it is possible to arrange special transmitters at suitable locations to exclude the system from

generating a debit entry when the mobile unit is present within a toll zone but only passing on the through route.

It is naturally possible to debit a vehicle when it is leaving a toll zone, but this is not the usual way. The debiting principal is although the same as for entering the zone 13 except that the unit 16 initiates a call only when it detects cells that cannot be found in the list of cells that are a part of the toll zone.

The advantage with this system is that the toll company directly receives payment of those who are using roads within the zone 13.

Another application of the present invention is shown in connection with figure 3, where a method for localizing a mobile unit in case of an alarm of any kind. Different types of alarm situations will be described in more detail below.

A mobile unit 16, that either may be placed together with goods that should be transported from one place to another or may be carried by a person, is provided with a means that is activated to send out a signal to a predetermined receiver under certain preconditions.

Figure 3 shows the example when a person 29 carries a mobile unit 16 and where the unit 16 is provided with an alarm button 30. An alarm is activated when the alarm button is pushed; alternatively it is possible that an alarm is activated if the alarm button is not pushed at predetermined intervals.

When the alarm is activated a telephone call 31 is established, alternatively a SMS message is sent, to a toll number 32, whereby the person is charged directly on his/hers phone bill 33 which is attached to the subscription (SIM card)

that is placed in the mobile unit 16, for using the alarm service. The message that is sent via the telephone call, or SMS, is forwarded to an alarm service 34 and contains information regarding who the person 29 is, so called
5 identification, and an approximate position indication which is obtained by the mobile telephone network (e.g. GSM), i.e. indicate the cell within which the person is present. The accuracy for such a position indication is about 150-300 meters, which is enough to be able to fast locate the person
10 in question and send help 35. The owner to the toll number 32 and the alarm service 34 could of course be the same party.

In the case when a telephone call is established, the carrier of the mobile unit has preferably already prerecorded a voice message that identifies the carrier, where the voice message
15 is used for identification. The position indication is forwarded preferably as a link to a home page, where the position of the person can be seen. All this information can alternatively be sent in text form via a SMS as described above.

20 Figure 4 shows how a system can be constructed and function to follow the position of an article during transport, but may also be used when tracking stolen boats, marine engines, rental cars, stolen cars, etc.

In the simplest case there is a functionality programmed into
25 the mobile unit 16 that automatically, at regular intervals, activates it self and sends a message, preferably in the form of a text message (SMS, MMS) to a receiver 40, with information about the identity of the unit and the position of the unit, which is obtained by knowing which cell in a mobile
30 telephone network the unit is present within.

By this method it is possible to detect unexpected movements of e.g. transport goods.

If it is not desired that the unit automatically should be sending updating information regarding its position, where every updating probably will be debited to the holder of the subscription for the SIM card that is in the unit 16, a SMS could be sent to the unit 16 when needed to activate a tracking of the same. This is especially interesting in case of a theft of e.g. marine engines (the unit could be mounted to an essential part of the engine), boats, cars, different types of valuables, etc. When it comes to marine engines, a such simple measure, as to provide the marine engine with a mobile unit during winter storage on land, could increase the chances of recovering a stolen marine engine essentially.

For rental cars there is a need to control that the vehicle is not used in a not appropriate way, e.g. transported outside the borders of the country to be sold in another less scrupulous country. By programming the unit 16 with information regarding a number of not allowed cells just outside the countries borders, and furthermore implement functionality that makes the unit regularly sense its position and compare it with the not-allowed cells, a message may be sent to the rental car company only when the car enters such a cell.

In addition to the functionality that may be built into the mobile unit, it may be complemented with various external sensors 41, e.g. motion sensors, audio sensors, that activates the unit by unexpected movements, sounds etc.

A preferred embodiment for managing debiting of alarm/anti-theft services is performed by sending the alarm/position

updates via a SMS to a toll number, whereby the appropriate subscribed is debited. Correct information is thereafter forwarded to suitable receiver 34, 40 dependent on the service that respective mobile unit 16 is connected to.

- 5 The fundamental principal that makes the described invention function is that each cell in a cellular network has its unique identity. This identity is broadcasted from the antenna within each cell at regular intervals. This principal is well known to a person skilled in the arts, and therefore not
10 explained in more detail.

The list of cells that is used in the present invention actually contains the broadcasted identity of the cells.

Claims

1. A method for providing a system that is operated by a first party, with position information from a mobile unit (16) provided with a unique identity and belonging to a second party, the first party provides a service that is dependent of the position of the mobile unit (16), the second party activates the use of the service, **characterized in** that the method comprises the further steps:

- to send a signal from the mobile unit (16) via a cellular communication network, when the second party activates the use of the service, to a toll number associated with a certain charge, the signal comprises information regarding the identity of the mobile unit (16) and position indication provided by the cellular communication network depending on which cell (14, 15; 14, 20, 21) the mobile unit (16) is present in, each cell within the cellular communication network defining a geographic area, and
- to debit said charge from an account connected to the mobile unit (16) and said second party.

2. The method according to claim 1, wherein the communication network is selected to be a GSM network.

3. The method according to any of claims 1 or 2, wherein the signal that is sent from the mobile unit (16) is sent in the form of a SMS, and that the information from the unit (16) may be presented on a home page.

4. The method according to any of the preceding claims, wherein said service is connected to a toll system, the mobile unit (16) is provided with a list of which cells (15; 20, 21) in the cellular communication network that is a part of a toll zone (13), said service is activated and a debit entry of a

toll charge is performed when the mobile unit (16) moves into one of said cells from a cell that is not on the list and/or moves within a cell, or several cells, that is on the list.

5 5. The method according to claim 4, wherein , when only a single charge is debited when the mobile unit (16) moves into the toll zone (13), the second party may be credited the single charge fully or partially if the mobile unit (16) leaves the toll zone (13) within a predetermined time period.

10 6. The method according to claim 4, wherein a time based charge is debited the second party dependent on how long time the mobile unit (16) has been present within a cell, or several cells, that is on the list.

15 7. The method according to claim 6, wherein the toll zone (13) is divided into sub zones, each of which has a predefined entering charge and/or time based charge.

8. The method according to any of claims 4-7, wherein the list of cells that is a part of the toll zone (13) is updated by generating a SMS that is sent to the mobile unit (16).

20 9. The method according to any of claims 4-8, wherein roads within the toll zone (13), so called through routes (22), are excluded from generating a debit entry when the mobile unit (16) is present there by arranging special transmitters at suitable locations.

25 10. The method according to any of the preceding claims, wherein information in the signal, which is sent when the second party activates the service, is forwarded to a party that provides the service.

11. The method according to claim 10, wherein the service that is provided is a personal alarm service, where the service is activated by pushing an alarm button (30).

5 12. The method according to claim 10, wherein the service provided is a tracking service to track goods being transported, stolen goods and/or cars, the service is activated through automatic updates of the present position of the mobile unit (16).

10 13. The method according to claim 12, wherein the mobile unit (16) is activated at regular intervals.

14. The method according to any of claims 12-13, wherein the service for the mobile unit (16) may be initiated by sending a message to the unit (16).

15 15. The method according to any of claims 12-14, wherein the mobile unit (16) further provided with one or more external sensors (41), which activates an alarm/update at unexpected or undesired activities detected by the sensors.

20 16. A mobile unit (16) for providing a system, operated by a first party, with position information, said mobile unit (16) is provided with a unique identity and belonging to a second party, the first party provides a service that is dependent of the position of the mobile unit (16), the second party activates the use of the service, **characterized in** that the mobile unit (16) comprises:

25 - means to send a signal via a cellular communication network, when the second party activates the use of the service, to a toll number associated with a certain charge, the signal comprises information regarding the identity of the mobile unit (16) and position indication provided by the
30 cellular communication network depending on which cell (14,

15; 14, 20, 21) the mobile unit (16) is present in, each cell within the cellular communication network defining a geographic area.

5 17. The mobile unit (16) according to claim 16, wherein the mobile unit is used in a toll system and being provided to have a list of which cells (15; 20,21) in the cellular communication network that is a part of a toll zone (13).

10 18. The mobile unit (16) according to claim 17, wherein the mobile unit is provided with means to receive an updated list of cells, preferably by using SMS.

19. The mobile unit according to claim 16, wherein the mobile unit is used as a personal alarm and being provided with an alarm button (30) that activates the service when being pushed.

15 20. The mobile unit according to claim 16, wherein the mobile unit is used for tracking goods, and being provided with means to send out automatic updates of the present position of the mobile unit.

20 21. A system for tracking the position of a mobile unit (16), **characterized in** that the system use the method according to any of claims 1-15.

1/2

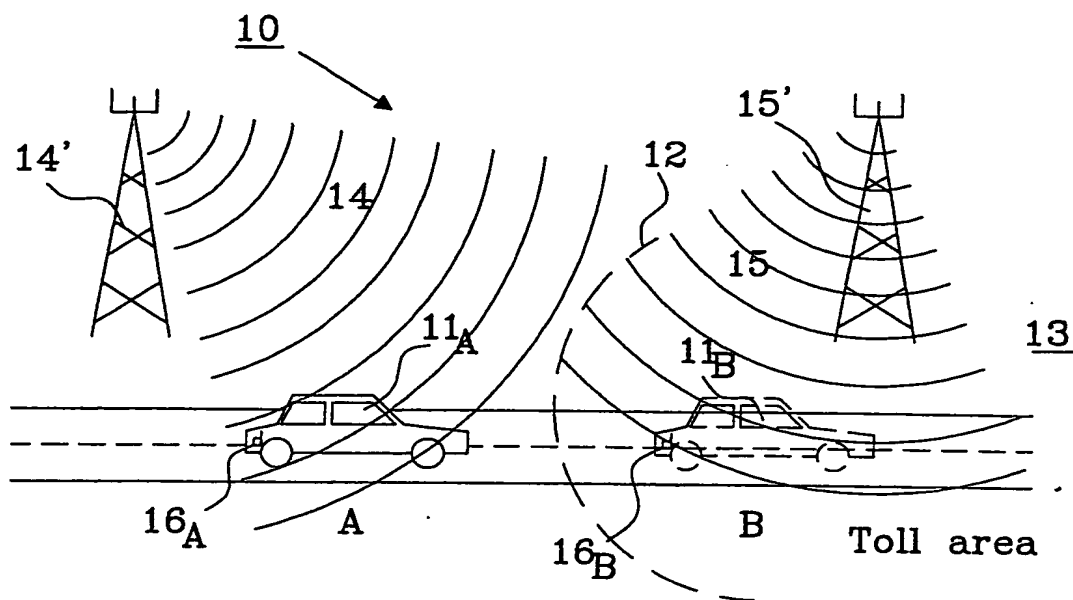


Fig. 1

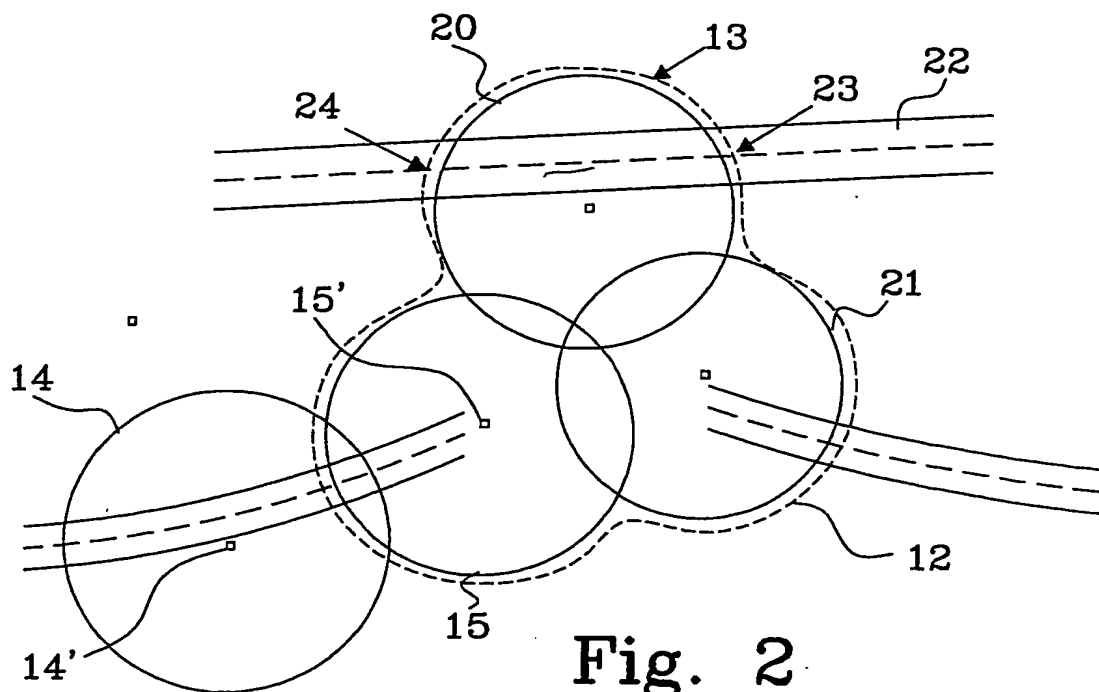


Fig. 2

2/2

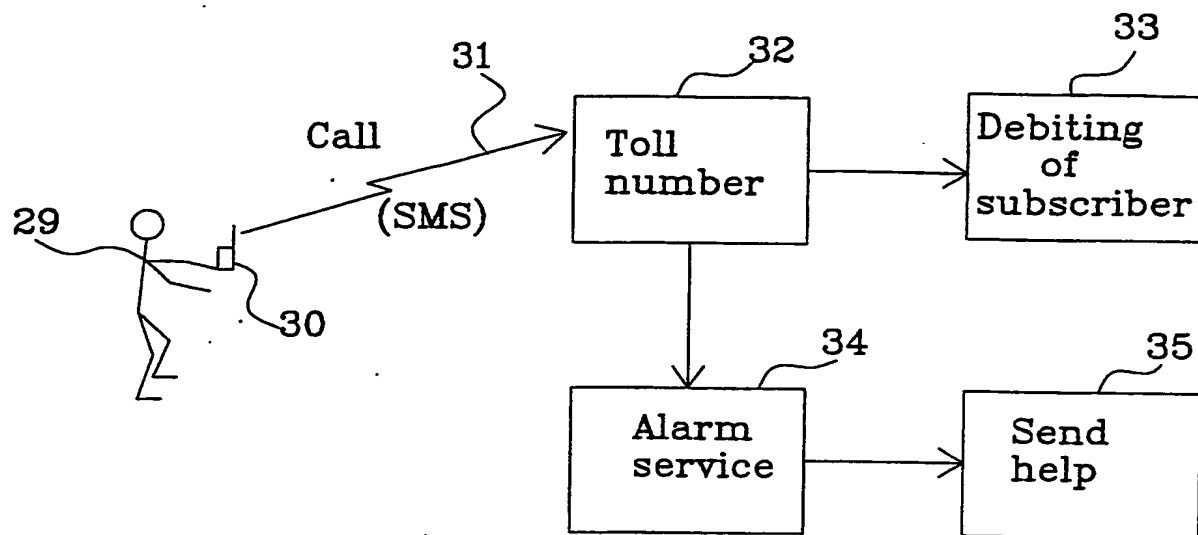


Fig. 3

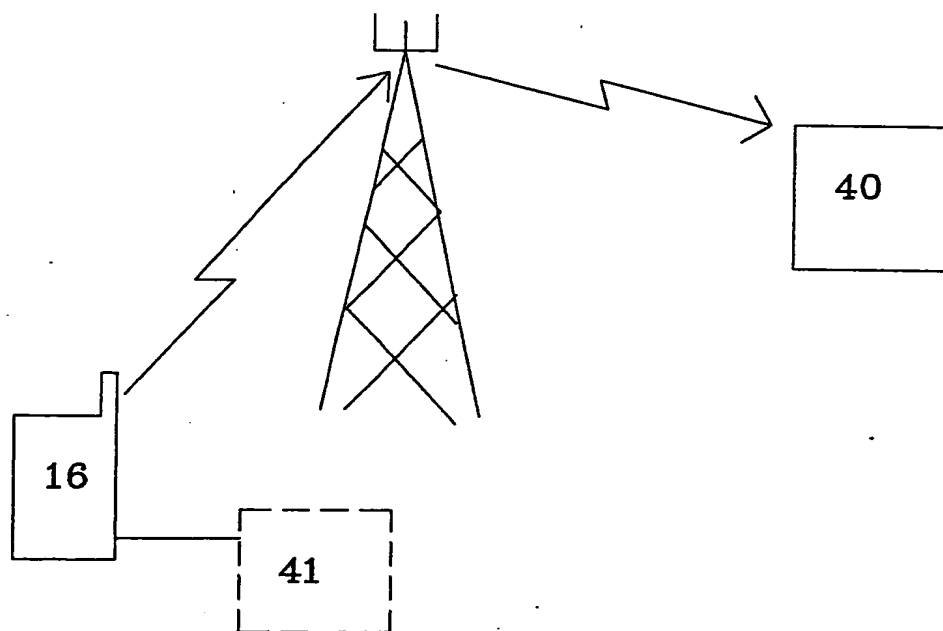


Fig. 4

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 2004/000688

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: G07B 15/00, G08B 25/10, H04Q 7/36

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: G07B, G08B, H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL, WPI DATA, PAJ, INSPEC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	PATENT ABSTRACT OF JAPAN Vol. 2002 No. 03 3 April 2002 (2002-04-03) & JP 2001 312755 A (FUKAYA YUICHIRO), 9 November 2001 (2001-11-09) abstract --	1-10,16-18, 21
Y	WO 0157747 A1 (RANIT T.S. TECHNICAL SERVICES LTD.), 9 August 2001 (09.08.2001), page 2 - page 4 --	1-10,16-18, 21

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

30 July 2004

Date of mailing of the international search report

05-08-2004

Name and mailing address of the ISA/
Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Antonio Farieta/MN
Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 2004/000688

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>DATABASE WPI Week 200336 Derwent Publications Ltd., London, GB; Class T05, AN 2003-376314 & JP 2003 030701 A (MITSUBISHI JUKOGYO KK), 31 January 2003 (2003-01-31) abstract</p> <p>--</p>	1-10,16-18, 21
A	<p>US 5933114 A (ALFONS EIZENHÖFER ET AL), 3 August 1999 (03.08.1999), column 1, line 5 - column 4, line 25</p> <p>--</p>	1-10,16-18, 21
A	<p>US 6198919 B1 (STEVEN BUYTAERT ET AL), 6 March 2001 (06.03.2001), column 3, line 62 - column 4, line 50</p> <p>--</p>	1-10,16-18, 21
A	<p>EP 0936794 A2 (NOKIA MOBILE PHONES LTD.), 18 August 1999 (18.08.1999), column 1, line 3 - column 3, line 26</p> <p>--</p>	11,19
A	<p>US 5218367 A (EIEZER A. SHEFFER ET AL), 8 June 1993 (08.06.1993), column 1, line 53 - column 3, line 20</p> <p>--</p>	11-15,19,20
A	<p>US 2002101365 A1 (KENNETH E. FLICK), 1 August 2002 (01.08.2002), see page 1, [0004] - page 2 [0017]</p> <p>-- -----</p>	12-15,20

INTERNATIONAL SEARCH REPORT
Information on patent family members

30/04/2004

International application No.

PCT/SE 2004/000688

WO	0157747	A1	09/08/2001	AU IL	3219101 A 134354 D	14/08/2001 00/00/0000
US	5933114	A	03/08/1999	AT AU CZ CZ DE DE DE EP ES HU HU HU NO PL PL WO	188332 T 2065995 A 286247 B 9602648 A 4408953 A,C 19580131 D 59507529 D 0750828 A,B 2143045 T 75476 A 222457 B 9602517 D 963779 A 177414 B 315955 A 9525410 A	15/01/2000 03/10/1995 16/02/2000 16/07/1997 21/09/1995 00/00/0000 00/00/0000 02/01/1997 01/05/2000 28/05/1997 28/07/2003 00/00/0000 13/09/1996 30/11/1999 23/12/1996 21/09/1995
US	6198919	B1	06/03/2001	AT AU BE CA DE DK EP SE ES GR JP PT WO BE BE EP	196964 T 5640696 A 1009388 A 2220661 A 69610626 D,T 830797 T 0830797 A,B 0830797 T3 2153574 T 3035197 T 11505990 T 830797 T 9638996 A 1010053 A 1010006 A 0785403 A	15/10/2000 18/12/1996 04/03/1997 05/12/1996 10/05/2001 05/02/2001 25/03/1998 01/03/2001 30/04/2001 25/05/1999 30/04/2001 05/12/1996 02/12/1997 04/11/1997 23/07/1997
EP	0936794	A2	18/08/1999	AU GB GB JP	9549598 A 2334412 A 9803146 D 11355402 A	17/05/1999 18/08/1999 00/00/0000 24/12/1999
US	5218367	A	08/06/1993	CA EP JP US US WO	2137002 A 0643860 A 8501645 T 5515419 A 5568535 A 9324911 A	09/12/1993 22/03/1995 20/02/1996 07/05/1996 22/10/1996 09/12/1993

INTERNATIONAL SEARCH REPORT

Information on patent family members

30/04/2004

International application No.

PCT/SE 2004/000688

US 2002101365 A1 01/08/2002

US	6512465 B	28/01/2003
US	6693563 B	17/02/2004
US	6703946 B	09/03/2004
US	2002014978 A	07/02/2002
US	2002101366 A	01/08/2002
US	2002105442 A	08/08/2002
US	2002105443 A	08/08/2002
US	2002105444 A	08/08/2002
US	2002154033 A	24/10/2002
US	2002154034 A	24/10/2002
US	2002154035 A	24/10/2002
US	2002154036 A	24/10/2002
US	2002156577 A	24/10/2002
US	2002158777 A	31/10/2002
US	2002158778 A	31/10/2002
US	2002163449 A	07/11/2002
US	2002163450 A	07/11/2002
US	2002173887 A	21/11/2002
US	2002190873 A	19/12/2002
US	6507786 B	14/01/2003
US	6509868 B	21/01/2003
US	6512466 B	28/01/2003
US	6522267 B	18/02/2003
US	6606561 B	12/08/2003
US	2002008644 A	24/01/2002
US	2002008645 A	24/01/2002
US	2002013660 A	31/01/2002
US	2002014977 A	07/02/2002
US	2002016672 A	07/02/2002
US	2002016673 A	07/02/2002
US	2002021242 A	21/02/2002
US	2003018429 A	23/01/2003
US	2003154027 A	14/08/2003
